
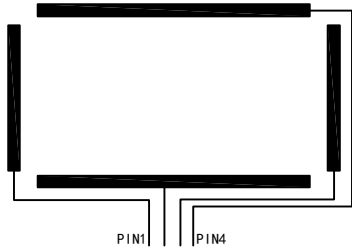
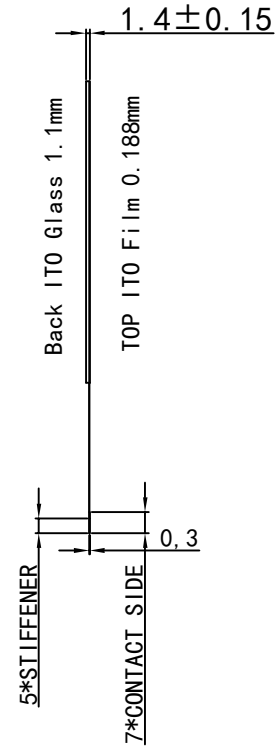


VERSION	MODIFY	DATE

PIN	Assignment
1	X+
2	Y-
3	X-
4	Y+

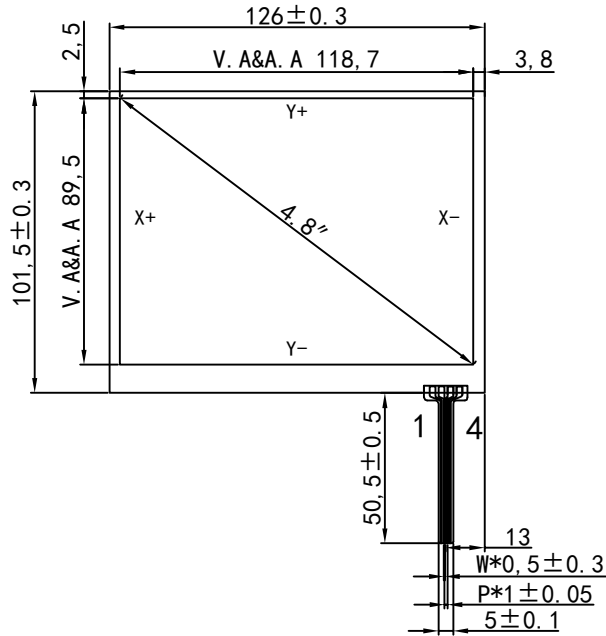

Notes:

- Type: Film to Glass
- Operating Voltage:  $\leq 10V$
- Operation Temperature:  $-10^{\circ}C \sim 60^{\circ}C$  Storage Temperature:  $-20^{\circ}C \sim 70^{\circ}C$
- Life Time:  $> 1,000,000$  times
- Connect Material: FPC
- Response Time:  $\leq 10ms$
- Linearity:  $\leq 1.5\%$
- Transmittance:  $\geq 80\%$
- Surface Hardness  $\geq 3H$  (pencil)
- Operation force:  $20g \sim 80g$
- Resistance: X:  $250 \Omega - 450 \Omega$  Y:  $600 \Omega - 1300 \Omega$

Obey Co., Limited			
MODEL NO.	DRAWN:	DATE:	VERSION:
<b>TS058A4N1</b>			1.0
UNIT:	TOLERANCE:	SCALE:	REV:
MM	$\pm 0.3$	1:1	