

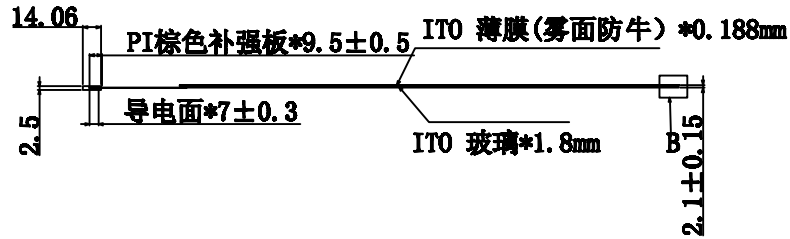
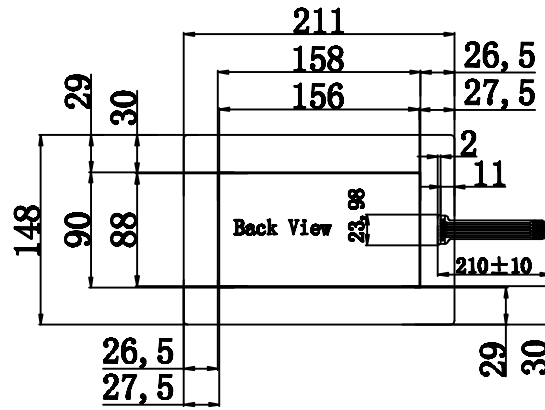
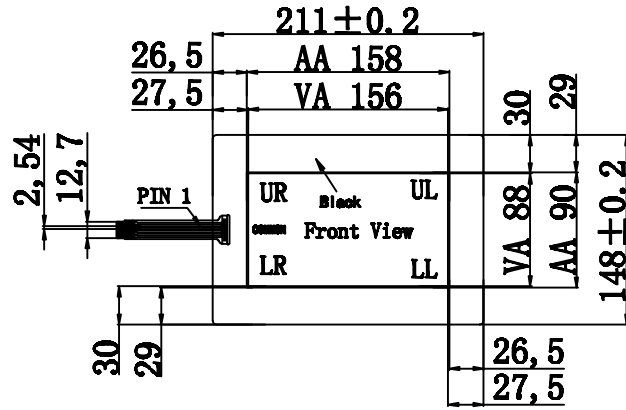


由 Autodesk 教育版产品制作



- Instruction:
1. Type: Film to Glass
 2. Operating Voltage: $3 \sim 7 \text{ V}$
 3. Response Time: $< 10\text{ms}$
 4. Storage Temperature: $-20 \text{ }^\circ\text{C} \sim 70 \text{ }^\circ\text{C}$
 5. Operation Temperature/Humidity: $-10 \text{ }^\circ\text{C} \sim 60 \text{ }^\circ\text{C} / 20\% \sim 95\%$
 6. Hitting Life: $> 10,000,000$ Times, 250gf Force;
 7. Writing Life: $> 1,000,000$ Times, 250gf Force;
 8. Contact Material: FPO+PIN

9. Film Thickness: 0.188mm
10. Glass Thickness: 1.8mm
11. Light transmission: $\geq 78\%$
12. Force: 100g or less
13. Linearity: $< 3.5\%$
14. Insulation: $\geq 20\text{M } \Omega$
15. Surface Hardness: $\geq 3\text{H}(pen\text{II})$
16. 未标注公差为 $\pm 0.2\text{mm}$

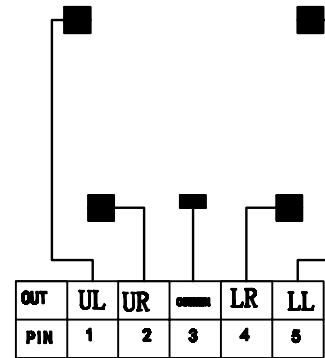

Obey Co., Limited

MODEL NO.	T8070A5K001	UNIT:	MM
DRAWN:		TOLERANCE:	± 0.3
DATE:	16/08/11	SCALE:	1:1
VERSION:	1.0	REV:	