由 Autodesk 教育版产品制作

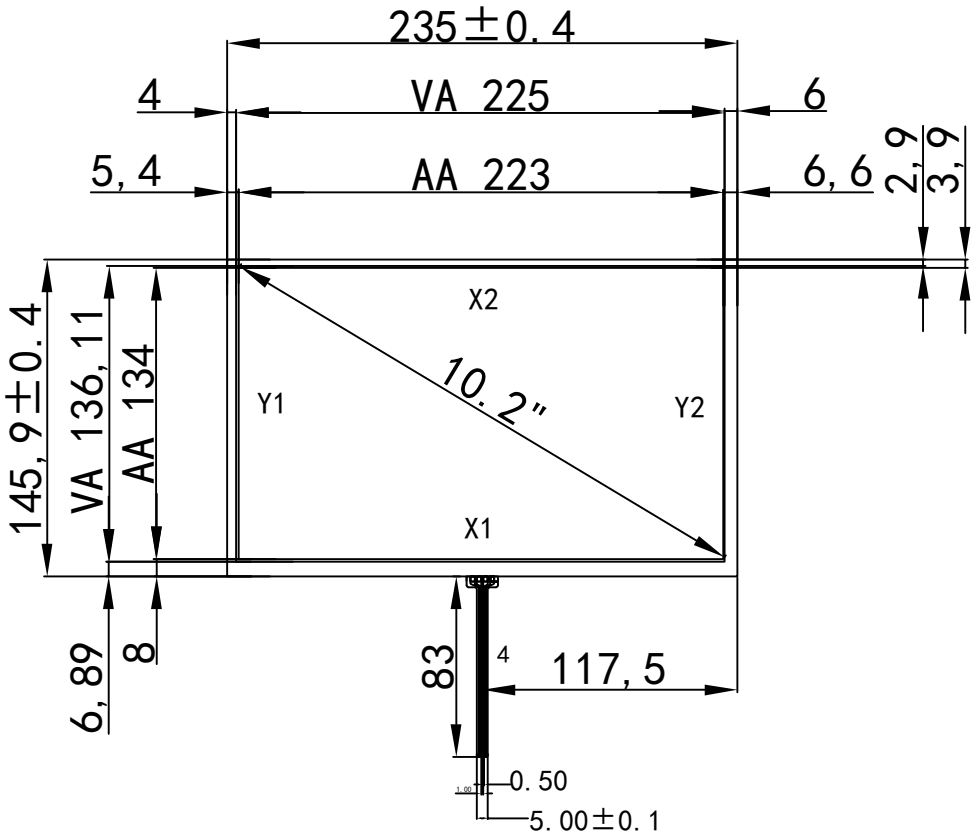

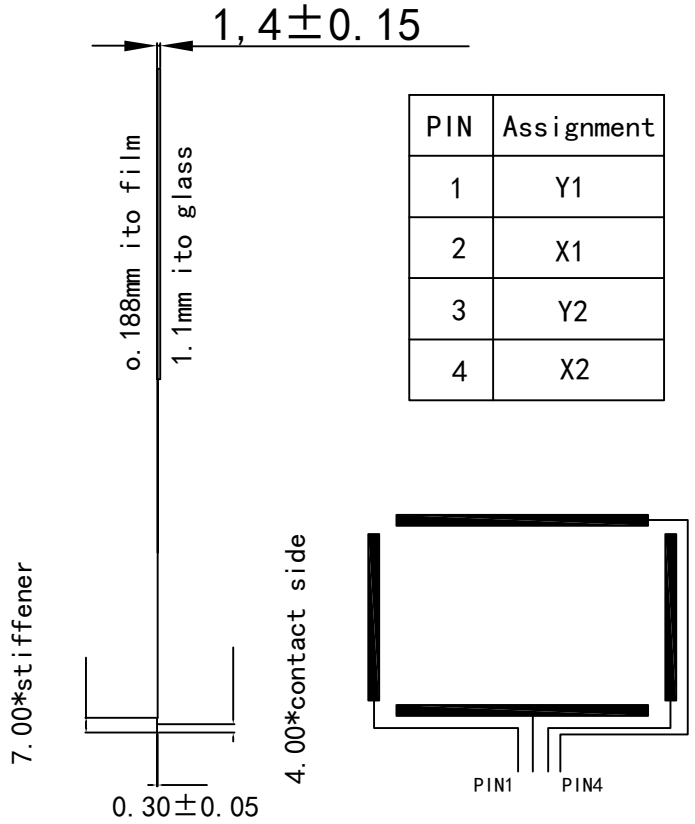

PIN	Assignment
1	Y1
2	X1
3	Y2
4	X2

注意：按客要求FPC反压,金手指朝上

Notes:

1. Type:Film to Glass
2. Operating Voltage:≤10V
3. Operation Temperature:-10℃～60℃ Storage Temperature:-20℃～70℃
4. Life Time: >1, 000, 000 times
5. Connect Material:FPC
6. Response Time:≤10ms
7. Linearity:≤1.5%
8. Transmittance:≥78%
9. Surface Hardness≥3H(pencil)
10. Operation force: 20g～120g
11. Resistance:X:350Ω-850Ω Y:150Ω-400Ω

Obey Co., Limited			
MODEL NO.	TS102A4K01	UNIT:	MM
DRAWN:		TOLERANCE:	±0.3
DATE:	12/12/28	SCALE:	1:1
VERSION:	2.0	REV:	TS102A4A2

Print to PDF without this message by purchasing novaPDF (http://www.novapdf.com/)