
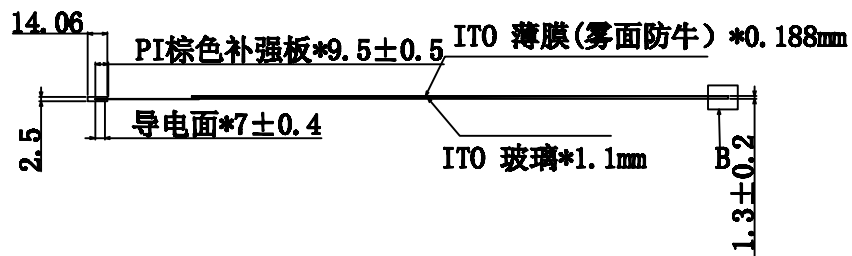
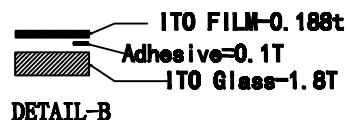
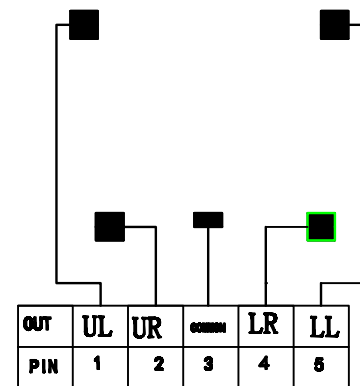


Front View

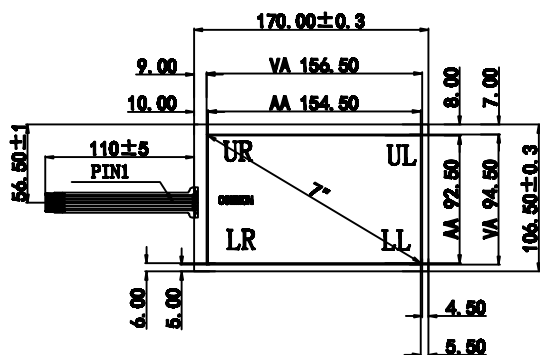

Instruction:

1. Type: Film to Glass
2. Operating Voltage: 3~7 V
3. Response Time: ≤10ms
4. Storage Temperature: -20 °C~+70 °C
5. Operation Temperature/Humidity: -10 °C~+60 °C/ 20%~95%
6. Hitting Life: >10,000,000 Times, 250gf Force;
7. Writing Life: >1,000,000 Times 250gf Force;
8. Connect Material: FPC+PIN
9. Film Thickness: 0.188mm
10. Glass Thickness: 1.1mm
11. Light transmission: ≥78%
12. Force: 100g or less
13. Linearity: ≤5%
14. Insulation: ≥20M Ω
15. Surface Hardness: ≥2H(pencil)
16. 未标注公差为±0.2mm

Obey Co., Limited			
MODEL NO.	TS071A5K01	UNIT:	MM
DRAWN:		TOLERANCE:	±0.3
DATE:	16/9/5	SCALE:	1:1
VERSION:	1.0	REV:	