





### TOP VIEW

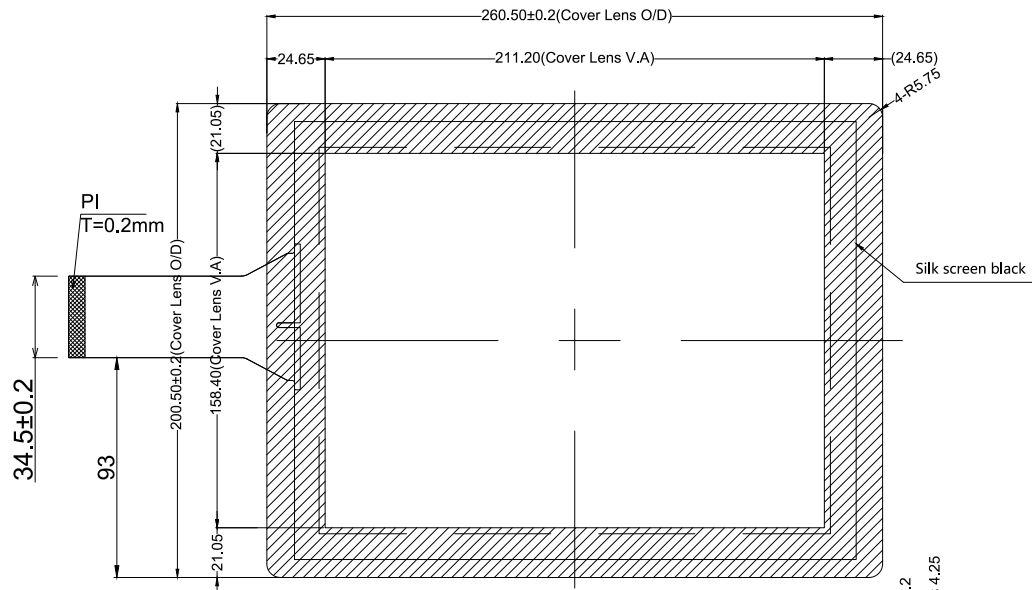

### BOTTOM VIEW

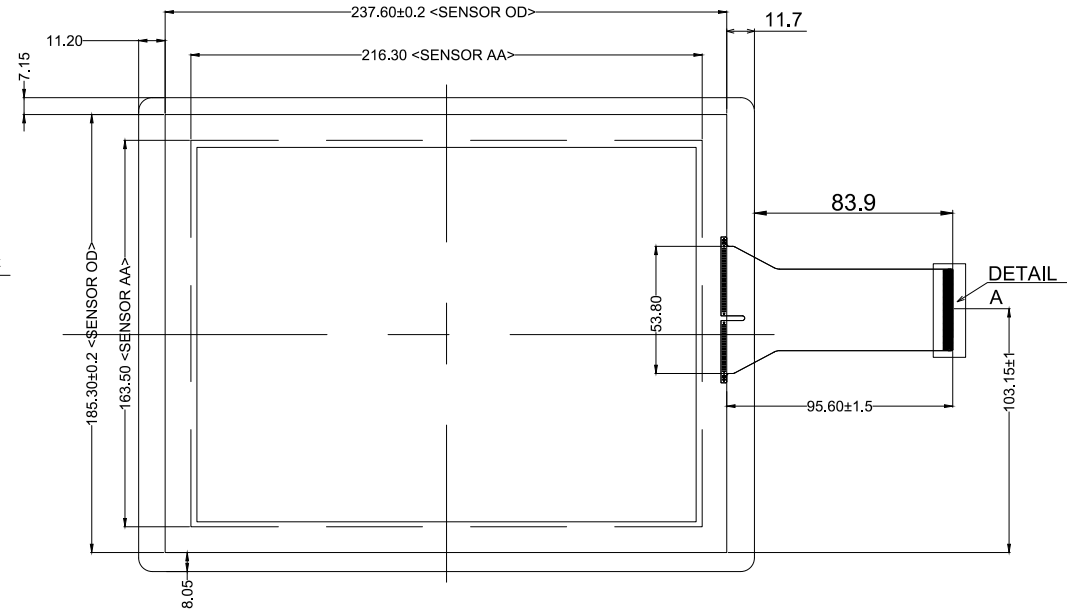

### SIDE VIEW

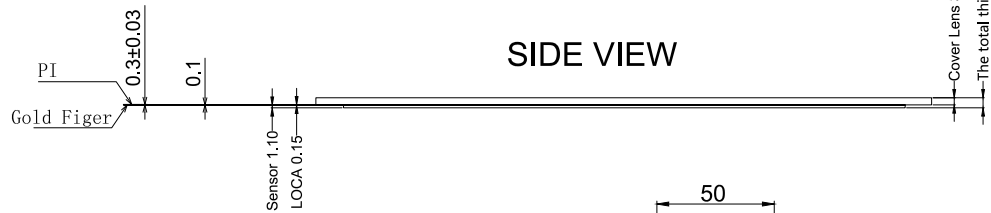

ILITEK2511 C2 P1 V1

#### USB

1	VDD/5V
2	D-
3	D+
4	GND

#### IIC

1	VCC
2	I2C_SDA
3	I2C_SCL
4	I2C_INT
5	GND
6	GND

#### Technical parameters:

1. COVER LENS To strengthen the glass;
2. FPC interface cable USB Interface;
3. IC (ILI2511) ILITEK2511 C2 P1 V1;
4. Working voltage: 5.0V;
5. The resolution: Automatic identification;
6. For the surface hardness 7H;
7. Light Transmission more than 86%;
8. Not specified tolerances ±0.2mm;
9. Products comply with RoHS standard.

#### Touch Panel Structure

TOP		
-----Cover		3.0mm
-----UV		0.15mm
-----ITO	}	1.1mm
-----Sensor glass		
-----ITO		
BOTTOM		

TCC-0129-10.4-V1

OBEYCROP-Obeytec			Product Name: 10.4 " Projected capacitive touch screen
Material	Weight	Unit	Product No. OB104P00-3M-C00
Glass +Glass		mm	Drawing No. OB104P00-3M-C00-D01
Sheet 1 of 1			