
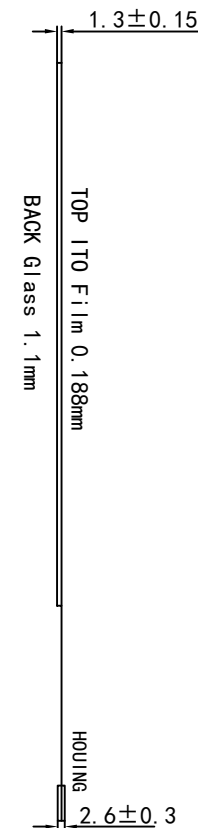
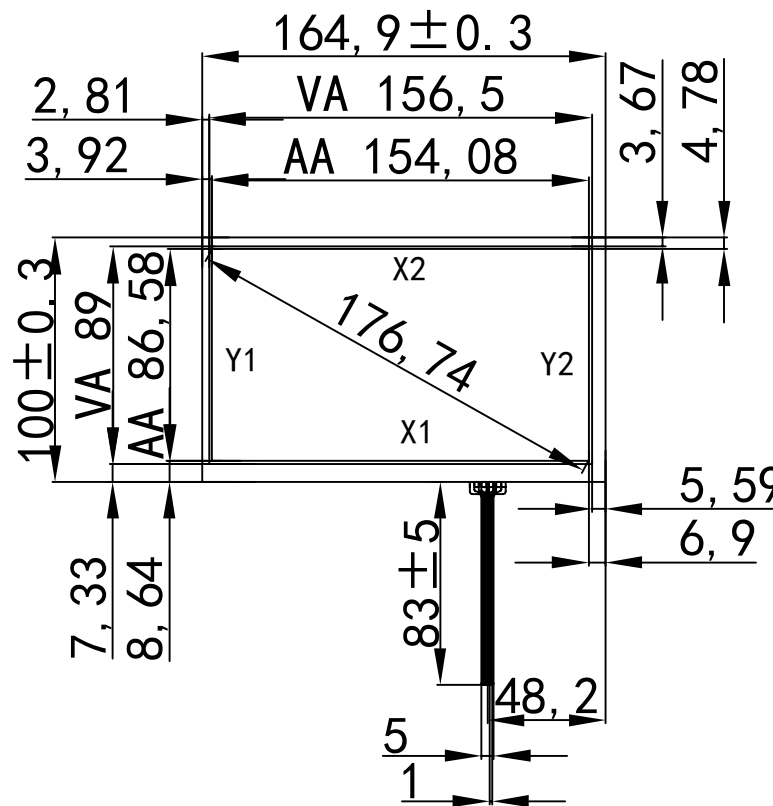


PIN	Assignment
1	Y1
2	X1
3	Y2
4	X2

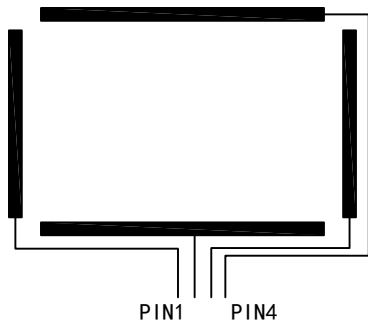

- Notes:
- 1. Type: Film to Glass
  - 2. Operating Voltage:  $\leq 10V$
  - 3. Operation Temperature:  $-10^{\circ}C \sim 60^{\circ}C$  Storage Temperature:  $-20^{\circ}C \sim 70^{\circ}C$
  - 4. Life Time:  $>1,000,000$  times
  - 5. Connect Material: FPC
  - 6. Response Time:  $\leq 10ms$
  - 7. Linearity:  $\leq 1.5\%$
  - 8. Transmittance:  $\geq 78\%$
  - 9. Surface Hardness  $\geq 3H$  (pencil)
  - 10. Operation force:  $20g \sim 100g$
  - 11. Resistance: Y:  $100\Omega - 600\Omega$  X:  $300\Omega - 950\Omega$

OBEY CO., LIMITED			
WWW.OBTOUCH.COM   WWW.OBEYCROP.COM			
MODEL NO.	TS070A4K01	UNIT:	MM
DRAWN:		TOLERANCE:	$\pm 0.4$
DATE:		SCALE:	1:1
VERSION:	1.0	REV:	