


PIN	Assignment
1	Y+
2	X+
3	Y-
4	X-

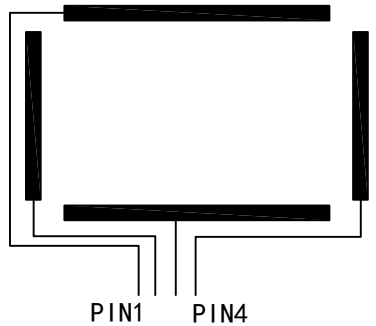

2.3±0.2

Contact Side*5 Back ITO Glass 1.8mm

Stiffenea*7 0.188mm

0.3

- Notes:
- Type: Film to Glass
 - Operating Voltage: ≤10V
 - Operation Temperature: -10°C~60°C Storage Temperature: -20°C~70°C
 - Life Time: >1, 000, 000 times
 - Connect Material: FPC
 - Response Time: ≤10ms
 - Linearity: ≤1.5%
 - Transmittance: ≥78%
 - Surface Hardness ≥3H (pencil)
 - Operation force: 60g~120g
 - Resistance: X: 200Ω-1000Ω Y: 100Ω-600Ω

OBEY CO., LIMITED			
WWW.OBTOUCH.COM WWW.OBEYCROP.COM			
MODEL NO.	TS106A4B01	UNIT:	MM
DRAWN:		TOLERANCE:	±0.3
DATE:		SCALE:	1:1
VERSION:	2.0	REV:	