

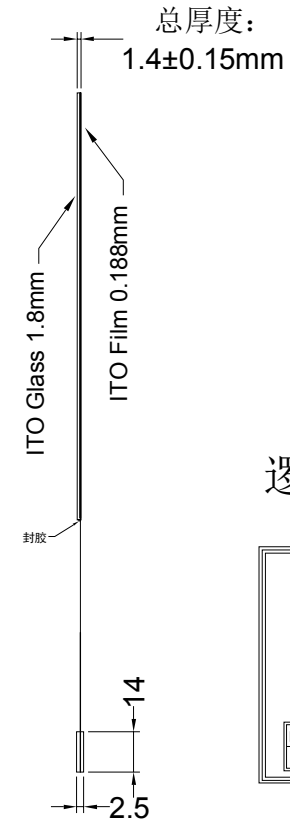


侧视图

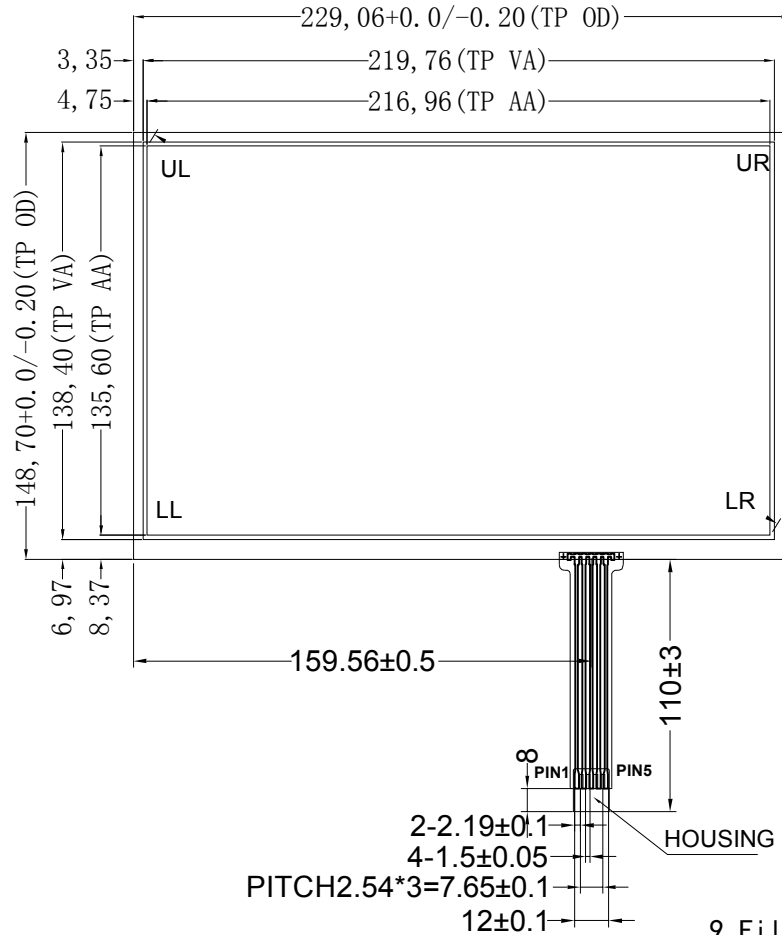

逻辑关系图:



Instruction:

1. Type: Film to Glass
2. Operating Voltage: $\leq 10V$
3. Response Time: $\leq 10ms$
4. Storage Temperature: $-20^{\circ}C \sim +70^{\circ}C$
5. Operation Temperature/Humidity : $-10^{\circ}C \sim +60^{\circ}C / 20\% \sim 95\%$
6. Hitting Life: $>10,000,000$ Times , 250gf Force;
7. writting Life $>1,000,000$ Times 250gf Force;
8. Connect Material: FPC+PIN

9. Film Thickness: 0.188mm
10. Glass Thickness: 1.8mm
11. Light transmission: $\geq 78\%$
12. Force: 100g or more
13. Linearity: $\leq 5\%$
14. Insulation: $\geq 20M\Omega$
15. Resistance: $50\Omega < PIN1, PIN2 < 250\Omega$
 $50\Omega < PIN2, PIN4 < 250\Omega$
 $50\Omega < PIN4, PIN5 < 250\Omega$
 $50\Omega < PIN5, PIN1 < 250\Omega$
16. Surface Hardness $\geq 3H$ (pencil)

| | |
|--------------------------|------------------|
| OBEY CO., LIMITED | |
| WWW.OBTOUCH.COM | WWW.OBEYCROP.COM |
| TS101A5K01 | |
| 未标公差 ± 0.3 | |