
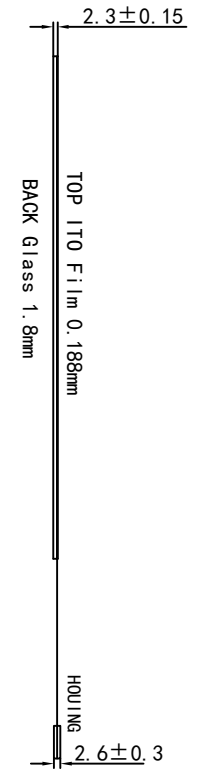
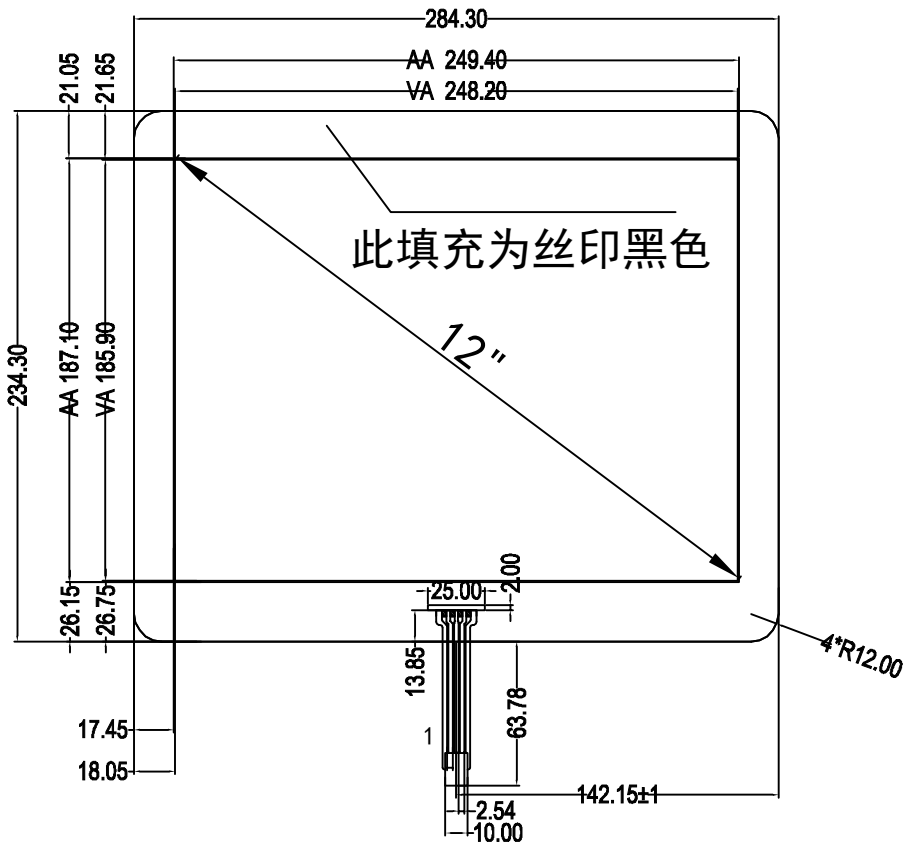


PIN	Assignment
1	Y1
2	X1
3	Y2
4	X2



Notes:

- |                                      |   |
|--------------------------------------|---|
| 1. Type: Film to Glass               | 2. Operating Voltage: ≤10V                |
| 3. Operation Temperature: -10°C~60°C | Storage Temperature: -20°C~70°C           |
| 4. Life Time: >1, 000, 000 times     | 5. Connect Material: FPC                  |
| 6. Response Time: ≤10ms              | 7. Linearity: ≤1.5%                       |
| 8. Transmittance: ≥78%               | 9. Surface Hardness ≥3H (pencil)          |
| 10. Operation force: 20g~100g        | 11. Resistance: Y: 200Ω-600Ω X: 250Ω-400Ω |

OBEY CO., LIMITED			
WWW.OBTOUCH.COM   WWW.OBEYCROP.COM			
MODEL NO.	TS121A4B02	UNIT:	MM
DRAWN:		TOLERANCE:	±0.3
DATE:		SCALE:	1:1
VERSION:	1.0	REV:	