




Top view

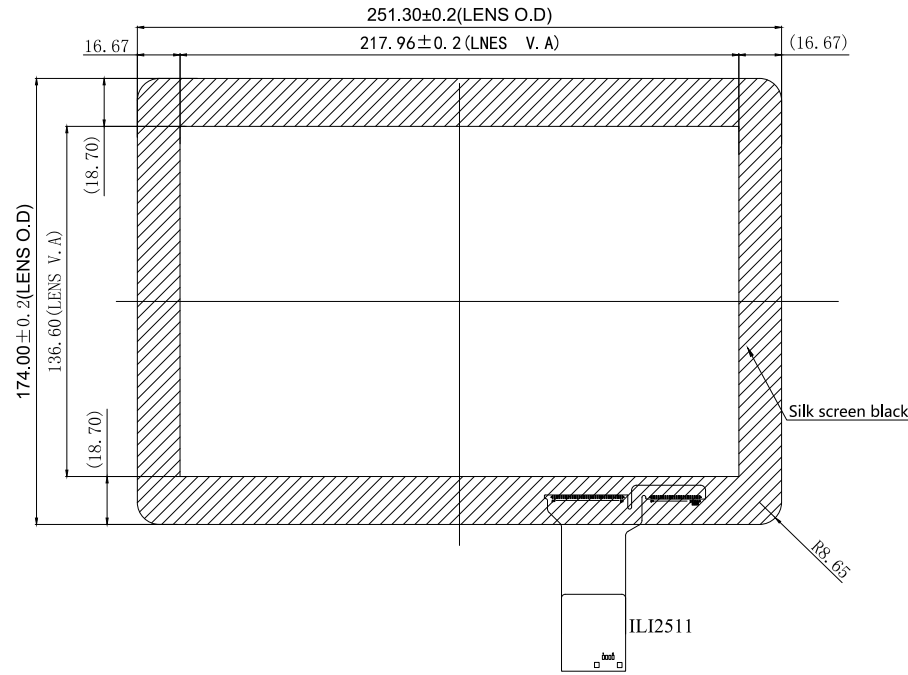

Side view

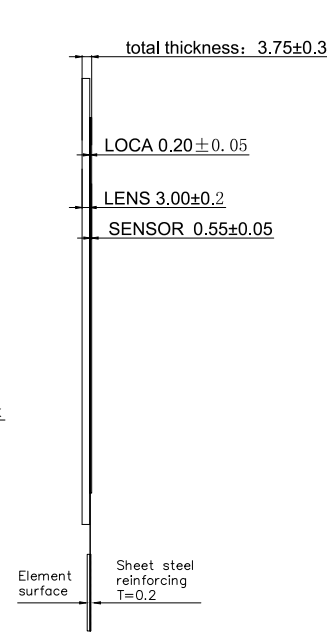

Bottom view

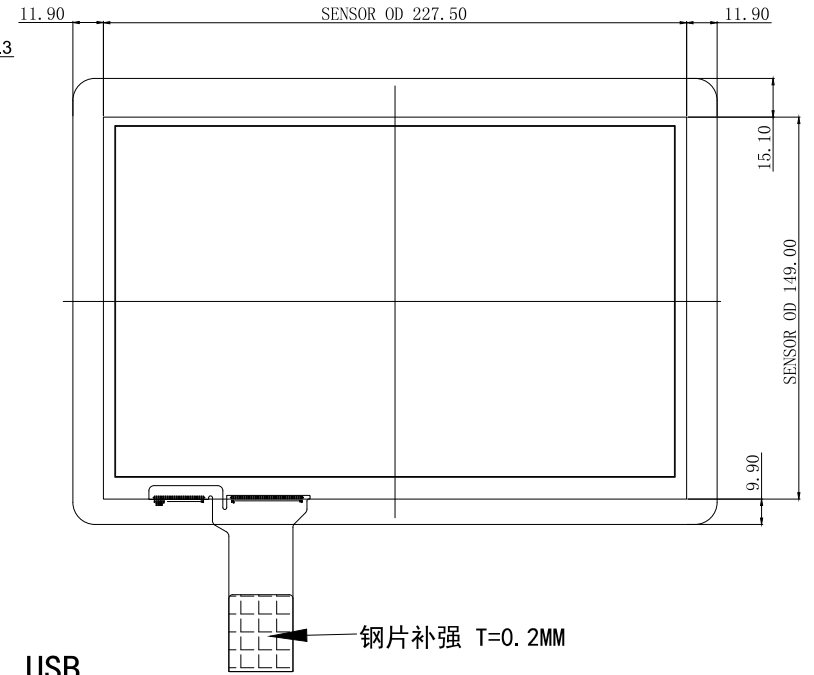

USB

| PIN | Define |
|-----|--------|
| 1 | GND |
| 2 | D+ |
| 3 | D- |
| 4 | VDD/5V |

Technical parameters:

1. COVER LENS To strengthen the glass;
2. FPC interface cable USB Interface;
3. IC (ILI2511) (TX23*RX37), 10point touch, 10 Voltage 3.3V;
4. Working voltage: 5.0V
5. For the surface hardness 6H.
6. Light transmittance > 83%.
7. Not specified tolerances ± 0.2mm.
8. Products comply with RoHS standard.

Touch Panel Structure

| | |
|-------------------|-------------|
| TOP | |
| -----Cover | 3.0mm |
| -----UV | 0.2mm |
| -----ITO | } 0.55mm |
| -----Sensor glass | |
| -----ITO | |
| BOTTOM | TC101002ACJ |

| | | | | |
|-------------------------|--------|------|--|--|
| OBEYCROP-Obeytec | | | Product Name: | |
| | | | 10.1" P-CAP touchscreen Screen Aspect Ratio 16:10 | |
| Material | Weight | Unit | Product No. | |
| Glass+Glass | | mm | OB101P00-3K-C00 | |
| Sheet 1 of 1 | | | Drawing No. | |
| | | | OB101P00-3K-C00-D01 | |